

Datalogger

DL.OCS/N/RS485



Customer benefits

- Multi-parameter probe: pressure, temperature and conductivity
- High-precision digital data logger with user-friendly software
- Thanks to the huge memory (1.5 Mio. values per channel) and the long battery lifetime (up to 10 years) the cost of ownership can be reduced to a minimum
- For varying conditions of use, 16 measuring series can be set up parallel
- Stainless steel and titanium version for use in acidic or otherwise aggressive media

Version: 12.05.2016

Technical Specifications

Pressure measuring range (mH₂O)

	2 ... 5	> 5 ... 20	> 20 ... 250
Overpressure	≥ 3 bar	≥ 3 x FS (≥ 3 bar)	≥ 3 x FS
Burst pressure, (1)	> 200 bar	> 200 bar	> 200 bar
Accuracy, (± % FS)	≤ 0.15	≤ 0.05	≤ 0.03
Total Error, (2), (3), (± % FS)			
-5 ... 50°C, (typ. / max.)	≤ ± 0.20 / 0.40	≤ ± 0.10 / 0.20 ≤ ± 0.5 / 1.0 cmH ₂ O	≤ ± 0.05 / 0.10
-5 ... 80°C, (typ. / max.)	≤ ± 0.50 / 1.00	≤ ± 0.10 / 0.20 ≤ ± 1.0 / 2.0 cmH ₂ O	≤ ± 0.10 / 0.20
Long term stability, (4)	< 0.5 % FS / < 4 mbar	< 0.2 % FS / < 4 mbar	< 0.1 % FS / < 0.2 % FS

(1) Transducer

(2) Total error including accuracy, hysteresis, repeatability and temperature influences

(3) The error values are valid within the corresponding temperature range

(4) 1 year (typ. / max.)

Temperature measuring range, (1) (°C)

	-5 ... 50	-5 ... 80
Accuracy (2)	≤ ± 0.5 °C	≤ ± 1.5 °C
Response time, (3), (4)		
T 0.50	9 s	9 s
T 0.63	15 s	15 s
T 0.90	27 s	27 s

(1) Temperature measurement included

(2) Accuracy of the equipment ± 2 °C

(3) Time in seconds that the sensor needs to carry out eg 63% of a temperature change

(4) Time of measurement for liquid medium

Conductivity measuring range

Standard	0 ... 200 mS / cm
Accuracy	
0 ... 200 μS / cm	≤ ± 2.5 % FS
0 ... 2 mS / cm	≤ ± 1.5 % FS
0 ... 20 mS / cm	≤ ± 1.5 % FS
0 ... 200 mS / cm	≤ ± 1.5 % FS

Temperature range

Operating temperature, (1)	-5 ... 50°C / -5 ... 80°C
Process temperature, (1)	-5 ... 50°C / -5 ... 80°C
Storage temperature	-40 ... 85°C

(1) Depending on cable type, pressure range, seal, measuring medium

Electrical specifications

Resolution	
Pressure	14 Bit
Temperature	14 Bit
Conductivity	14 Bit
Output	
Interface	RS485
Protocol	STS Layer 8
Baudrate	38'400 bps
Power supply (1)	Lithium Batterie SAFT LS 14500, 3.6V AA 2250 mAh
Standby current	6 uA / 15 uA (typ./max.)
Operating current	< 25 mA
Battery life, (2)	> 10 years
Max. cable length	300 m

(1) External power supply (9...30VDC) on request

(2) Lifetime at 1 measurement / hour, 0...40°C

Functions

Data format	Data are stored in ASCII format
Data memory	Up to 1.5 Mio measurement values per channel, data remains in memory even without battery, each measurement value is correlated with time and date
Data transfer	Read out data per measurement series, Read out all stored data, Read out data for a defined time-period
Real-time clock	Quartz-precision clock with date, Start-time of datalogging configurable
Identification	Each datalogger has a unique serial number, as well as a user-definable description
Battery indicator	Battery level indicator, calculated by considering the ambient temperature and the battery properties
Configuration	Sample rate, threshold values, Identification (f.e. measuring series), Taring of measurement value, Density of the measuring medium, Measurement units

System Requirements

PC / Notebook	Min. 1.6 GHz Dual Core x86, Memory: Min. 10 GB, RAM: Min. 2 GB
Tablet PC	Please contact STS
Operating System, (1)	Windows XP SP3, 7, 8, 8.1, 8 Pro (32-/ 64-Bit)

(1) Not compatible with Windows 8 RT

Qualifications

	Description	Level	Typical interferences
EN 61000-4-2 EN 61326-1	Electrostatic discharge	8 kV contact 15 kV air	
EN 61000-4-4 EN 61326-1	Transients (burst)	4 kV	Motors, valves
EN 61000-4-5 EN 61326-1	Surge	2 kV	Overvoltage
EN 61000-4-6 EN 61326-1	Conducted RF	10 V (0.15 ... 80 MHz)	Frequency converters
IEC 60068-2-6	Vibration	2g (5...2000Hz)	

Physical specifications

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2)
Housing level transmitter	Stainless steel (316L / 1.4435), titanium (Gr. 2)
Housing suspension	Stainless steel (316L / 1.4435), titanium (Gr.2)
Seals	Viton (standard), EPDM, Kalrez, NBR
Cable	PUR, FEP, PE
Weight (1)	150 g

(1) Specification for a DL.OCS/N/RS485, closed, cable

Cable specifications

	Pressure	Temperature
PUR	≤ 25 bar	-5 ... 50°C
FEP	≤ 25 bar	-5 ... 80°C
PE	≤ 25 bar	-5 ... 80°C

Accessories

Overview

10.00.0091	Accessories overview
-------------------	----------------------

Software / Firmware

114209	DL.OCS PC Application Software
---------------	--------------------------------

Additional documents

Operating and safety instructions

	Article number
10.88.0397	DMM033

Ordering information

		X	XX	XX	XX	XX	XX
Type	DL.OCS/N/RS485						
Pressure type	Gauge	1					
	Absolute (vacuum)	2					
Pressure measuring range (1)	0 ... 2 mH ₂ O and 0 ... 250 mH ₂ O	XX					
	Offset, special adjustment	99					
Model	With connection housing (Fig. 1)	1					
	With connection housing (for ext. power supply) (Fig. 1)	3					
	Without connection housing (Fig.3)	0					
Cable	PUR cable, IP 68, black (2)	0					
	PE cable, IP 68, black (2)	1					
	FEP cable, IP 68, black (2)	2					
	PUR cable, black, IP 68, plug-in (Fig. 7), (2)	4					
	PVC cable, blue (ACS certified) (2)	5					
	Without cable(Fig.3)	3					
Process connection	Closed (Fig. 4)			57			
	Open (Fig. 5)			58			
	Closed, 1.4435 (Fig. 4) (4)			59			
	G 1/4 M			11			
	G 1/2 M (Fig.2)			13			
Transmitter housing material	316L Stainless steel 1.4435			0			
	Titanium CP Grade 2			1			
	Titanium CP Grade 2 (absolute type)			1			
Connector housing material	316L Stainless steel 1.4435			0			
	Titanium CP Grade 2			1			
	without connection housing (Fig.3)			2			
Seal material	Viton (Standard)				0		
	EPDM				1		
	Kalrez				2		
	NBR (ACS) (4) (5)				3		
Temperature range	-5 ... 50°C compensated (allowed process temperature: -5 ... 50°C)					4	
	-5 ... 80°C compensated (allowed process temperature: -5 ... 80°C) (3)					5	
Option	Conductivity (316L Stainless steel 1.4435) (Fig. 6)						D
	Conductivity (Titanium CP Grade 2) (Fig. 6)						P
	Ballast weight 316L Stainless steel 1.4435						B
	Flooding protection 316L Stainless steel 1.4435						I


(1) Other pressure ranges on request

(2) Please specify the required cable length

- (3) Cable type PE & FEP, pressure range < 10 bar
- (4) For ACS Certification
- (5) For ACS Certification only without conductivity

Technical drawings

Dimensions

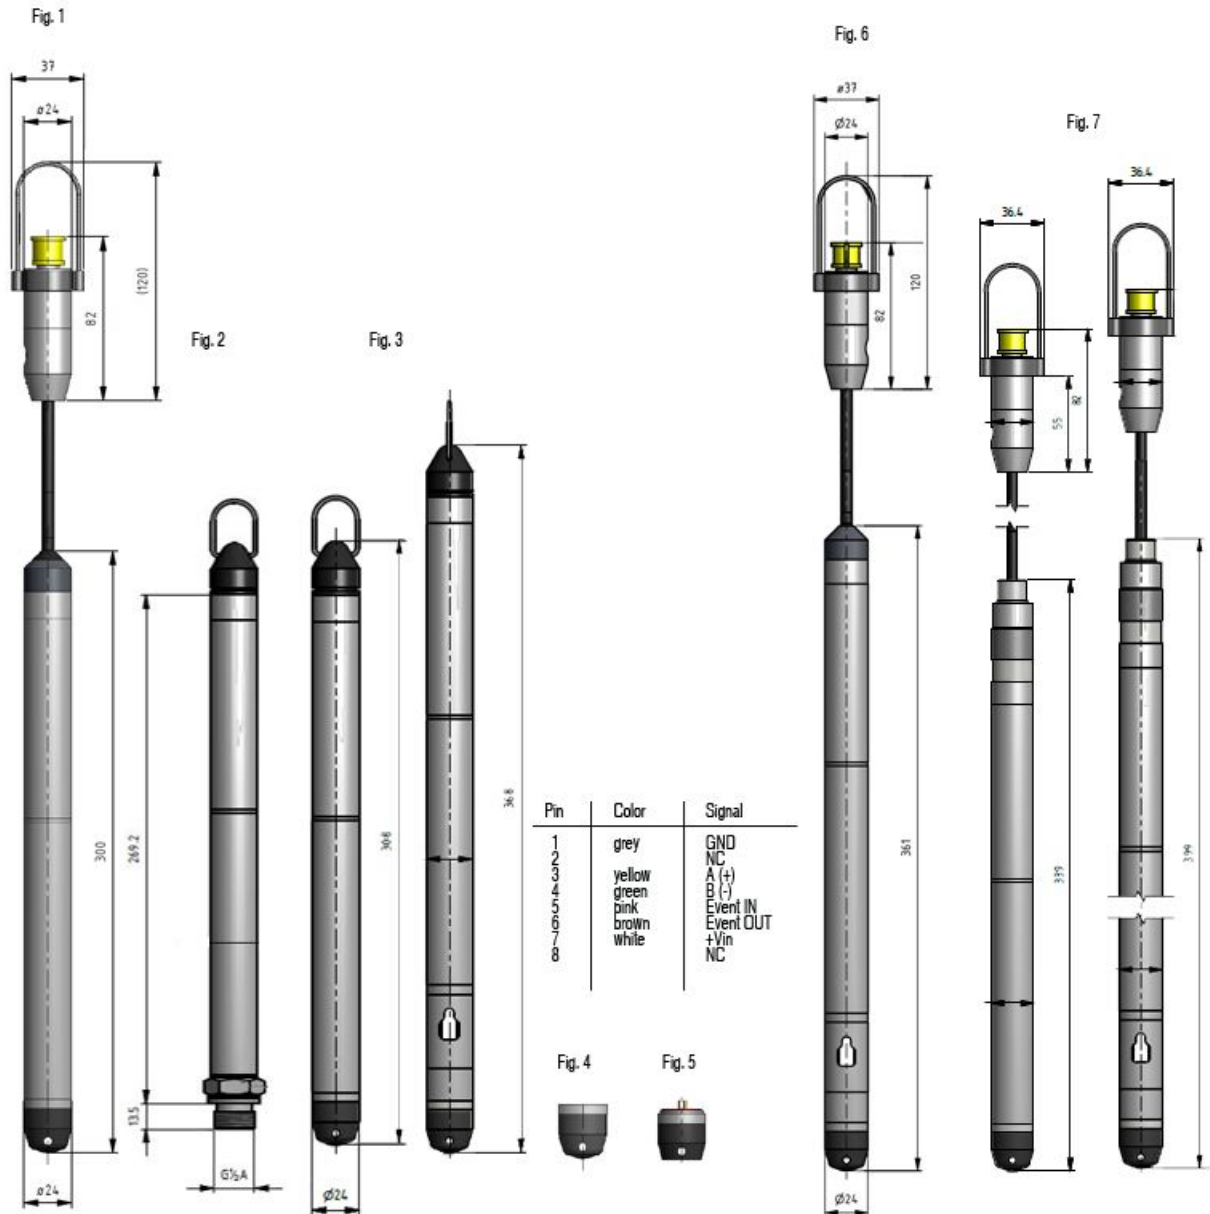

Specifications may change without notice.

STS Headquarters, Switzerland:
 STS Sensor Technik Sirmach AG
 Rütihofstrasse 8, 8370 Sirmach, Switzerland
 sales@stssensors.com | www.stssensors.com

STS France:
 STS France
 844 Route de la Caille, 74350 Allonzier la Caille, France
 info-fr@stssensors.com | www.stssensors.fr

STS Germany:
 STS Sensoren Transmitter Systeme GmbH
 Poststrasse 7, 71063 Sindelfingen, Germany
 info-de@stssensors.com | www.stssensors.de

STS Great Britain:
 STS Great Britain Ltd.
 Box 3942 | Warwick | CV34 9AE, United Kingdom
 contact@stssensors.com | www.stssensors.co.uk

STS Italy:
 STS Italia s.r.l.
 Via Gesù 5, 20090 Opera (Milano), Italy
 info-italia@stssensors.com | www.stssensors.it